


DUCT TAPE #N23

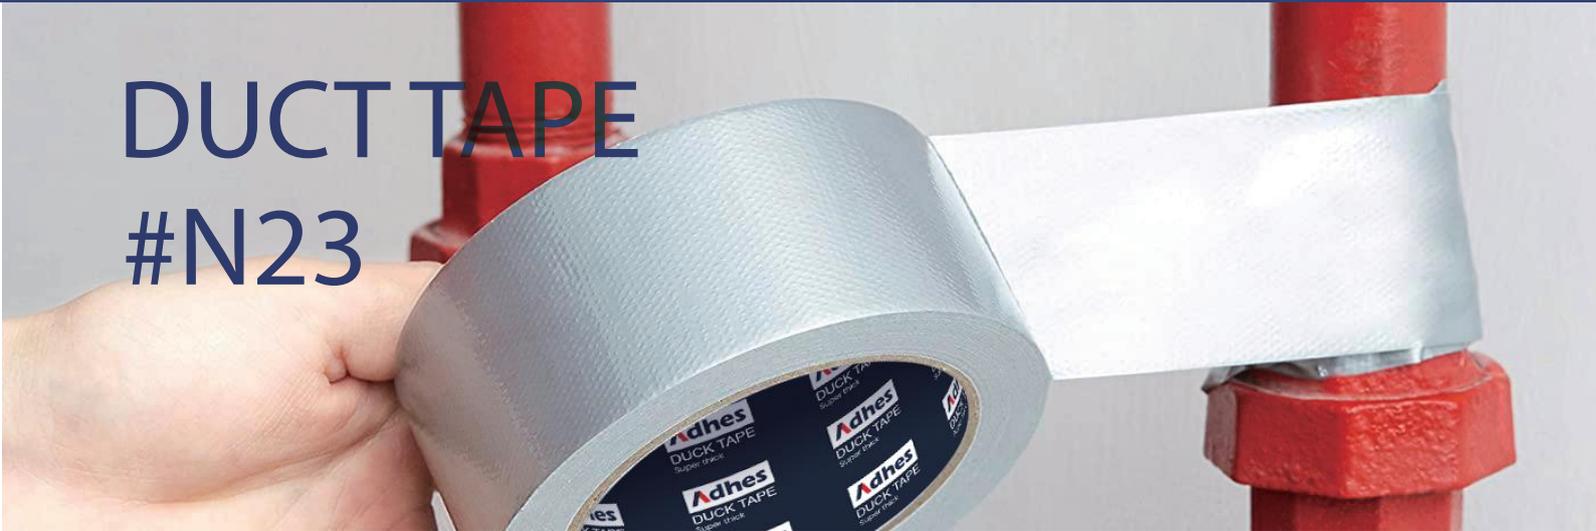

DESCRIPTION

Highly concentrated natural rubber, three times stickier and twice as thick. It can be used roughly and makes the repair more solid and longer lasting. It is applicable to smooth, rough and uneven surfaces, such as wood, stone, soil, plaster, brick, etc. Rugged, weatherproof, resistant to moisture, UV rays and extreme temperature.

APPLICATIONS

It is mainly used for pipe repairing, carton sealing, carpet joint splicing, heavy duty binding, waterproof packaging, etc. It is also frequently used in the automobile, paper and electromechanical industry in the places that are well waterproofed such as automobile cab, chassis and cabinet.

PRODUCT FEATURES

Material: PE
Overall Grade/Function: Top Class
Adhesive: Natural Rubber

Characteristics:

- Strong peeling force and tensile
- Corrosion resistance
- Relatively high stickiness
- Grease resistance
- Waterproof

CORE SIZE

3 in / 7.7cm

COLOR(S)

 Silver  Black

WIDTH(S)

48mm

LENGTH(S)

50m

Contact your ADHES sales representative for other available sizes

SPECIFICATIONS

STANDARD

Thickness	230±5um
Initial adhesion	22#
Holding power	-
180° Peel Strength	10N/25mm
Tensile Strength	99N/25mm
Operating Temperature	0~40 C
Applicable Temperature	-20-93 C
Service Life	1 Year
Storage Suggestion	15-30°C(59-86°F),40-70% of Relative Humidity

IN-STOCK MODEL NUMBER



■ ADU-D4850NB23

■ ADU-D4850NS23